

IF ONLY AVIM
COULD FIX THAT
SWITCH
PROBLEM...



HEY, WINDY,
CAN YOU
HELP?

Kiowa Switch Fix



SURE
THING!




Dear Windy,

We have a problem with the fuel boost pump switch on an OH-58A with a crashworthy fuel system.

The switch housing rubs against the screw that holds the glare shield to the instrument panel.

Any ideas for a fix, Windy?

SP5 J. M. G.

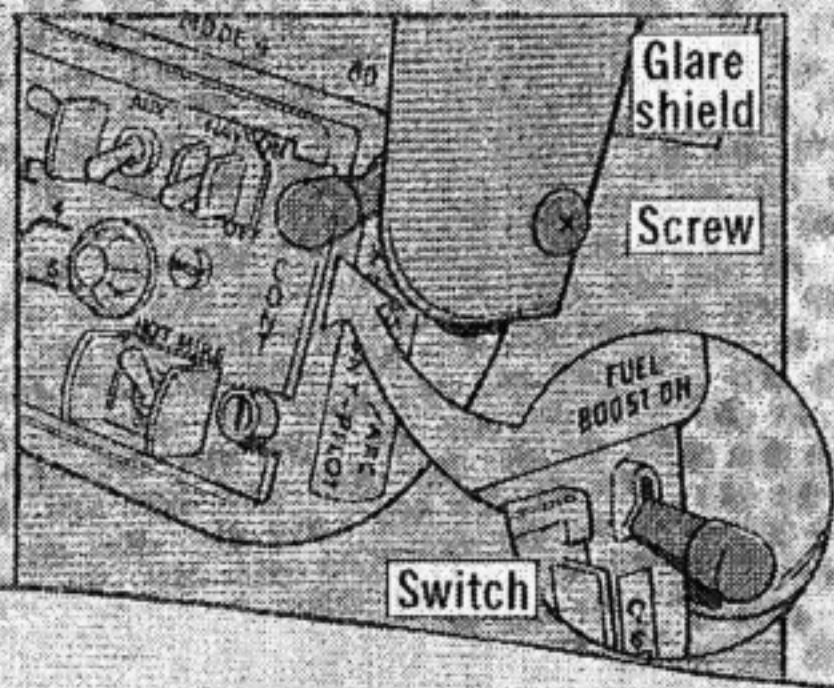

Dear Specialist J. M. G.,

Sounds like the switch was installed a bit too far to the right.

Remove the screw and re-install it with the head on the inside of the glare shield and the nut on the outside. This will give the added clearance you need.