




From Screws to Bolts

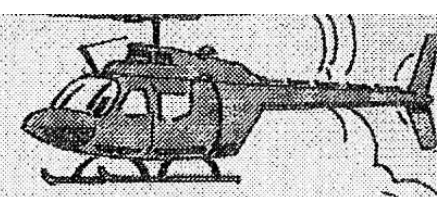

There're a few places on the OH-58A/C where work space is limited. You can't use enough "umph" on a screwdriver, so the screws get chewed up.

The screws are in the fuel shutoff valve cover, fire wall cone and at the particle separator. The engineers at the big hangar say you can use bolts for easy removal, instead of screws.

In all but one case, use washer, NSN 5310-00-167-0801, to keep the bolts from bottoming out.


HERE'RE WHERE BOLTS, NSN 5306-00-145-7053, CAN NOW BE USED!



Location in TM 55- 1520-228-23P


Screw

Item 6, Fig 26 NSN 5305-00-180-3322

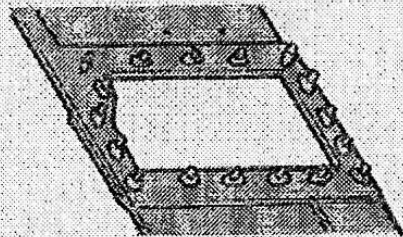

Item 125, Fig 36 NSN 5305-00-180-3322

Item 130, Fig 36 NSN 5305-00-059-3659

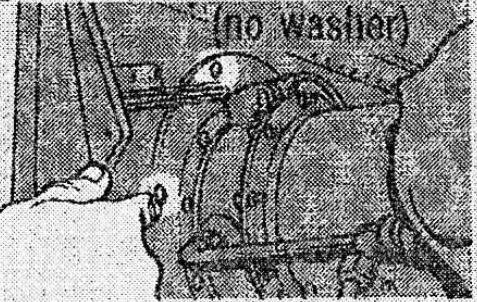

Item 12, Fig 55 NSN 5305-00-088-9044

