
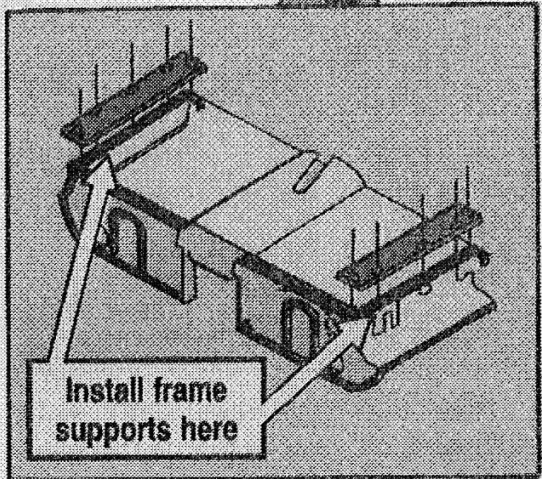


OH-58.

Seat Frame Supports Prevent Damage

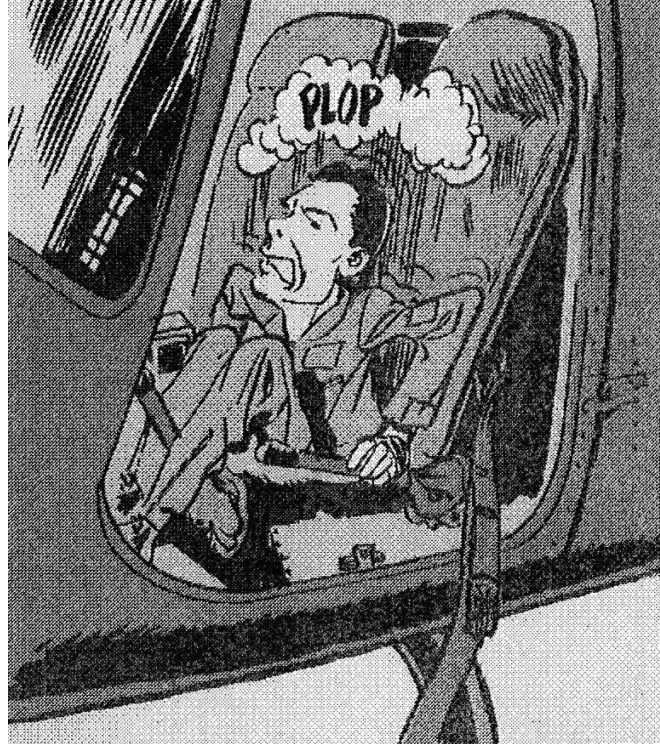

Dear Windy,

When crew seat panels are removed from the OH-58 for cabin maintenance, mechanics step on the seat frames and damage them.

But we stopped the damage by making a brace to fit over the frames to protect them from heavy-footed mechanics inside the cabin.

Use 2 plies of $\frac{1}{2}$ -in thick phenolic sheet, NSN 9330-00-880-4870, cut to the same length as the seat frame and approximately $2\frac{1}{4}$ inches wide. Drill holes in the phenolic to match the holes in the seat frame. Attach the phenolic with the hardware used to mount the seat panels.

You can install the braces in minutes and save Uncle big bucks in support replacement costs.

Moses L. Daniels
Steven L. Ohler
Hunter AAF, GA

(Editor's note: Sounds like a winner!)