

OH-58 ...

Support Your Seat



You got the word in ATCOM Msg OH-58-95-ASAM-04, 071518Z Feb 95, to check your Kiowa seat assemblies and get them in shape. Seems there's been a big problem with the seat side supports getting damaged when the seat panels are removed.

Now that your frames are looking good, take a preventive maintenance step to keep the side supports in shape. Make a brace to fit over the supports to use when you're doing maintenance with the seat panels removed.

Use two plies of $\frac{1}{2}$ inch thick phenolic sheet, NSN 9330-00-880-4870, cut to the same length as the seat frame and approximately $2\frac{1}{4}$ inches wide.

Drill holes in the phenolic sheets to match the holes in the seat frame. Attach the sheets with the hardware used to mount the seat panels.

You can install the braces in minutes and save the seats! Make sure to remove the braces when your maintenance is done and return the seat to its original structure.

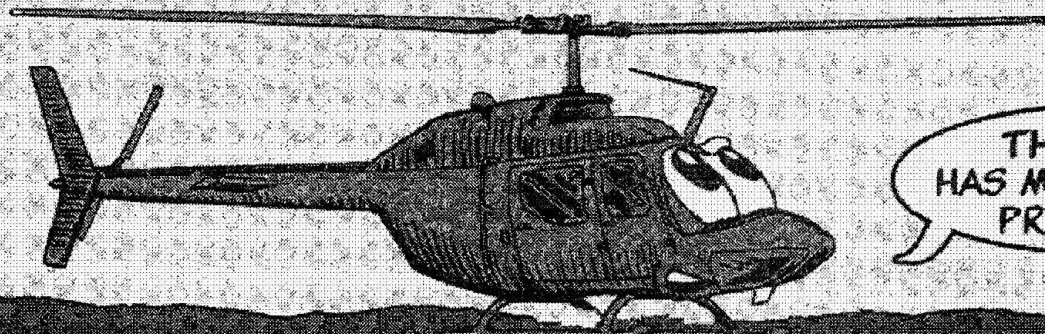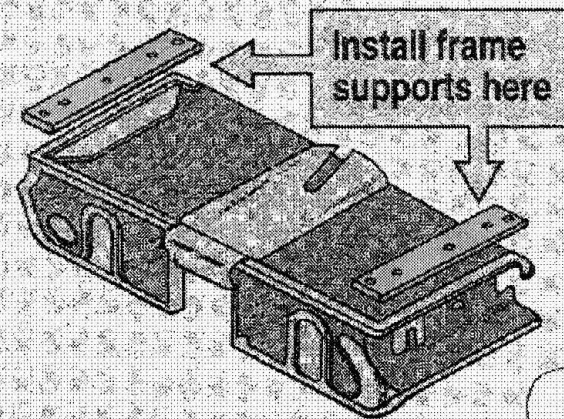

THAT FIX
HAS ME SITTING
PRETTY!